

ERBESSD INSTRUMENTS®

EI SERIES

Balancing Machines

EI-30

The ideal balancing machine for all types of rotating parts up to 30kg including rollers, motor rotors, crankshafts, mills, and many others.



The floating bases of the EI-30 are manufactured **tough** and **light** to reduce mechanical inertia.

TECHNICAL SPECIFICATIONS

Dimensions:

725 x 456 x 595 mm

Sequential unbalance reduction:

95%

Weight:

25 kg (55 lb)

Max rotor diameter:

508 mm (20 in)

Max weight per base:

15 kg (33 lb)

Power transmission:

Flat belt

Max journal diameter:

88 mm (3.4 in)

Max SBS displacement:

11 mm (0.43 in)

Lubrication:

Manual

Precision:

±0.01 mm/s

Accelerometer Sensitivity:

100 mV/g

Residual unbalance:

2 gr·mm/ 100kg rotor

Min/Max symmetric load:0.1 kg(0.6 lb)
15 kg (33 lb)**Min/Max distance between supports:**15 mm (0.59 in)
465 mm (18.3 in)**Motor features:**0.12 W (1/6 HP)
90 VDC**Speed driver (VFD):**

Included

For more information. Visit our **YouTube** page.

<https://www.youtube.com/c/ErbessdinstrumentsOfficial>

Every balancing machine in the **EI Series** has a **Soft Bearing Suspension (SBS)** built in.


The **SBS** technology guarantees the most reliable balancing with the easiest to use software.



The **SBS** base has the capability to rotate itself within its axis and has an **horizontal 45° tilt**. These features protect the poles and provide maximum **durability**.




ADAPTABILITY LIKE NO OTHER

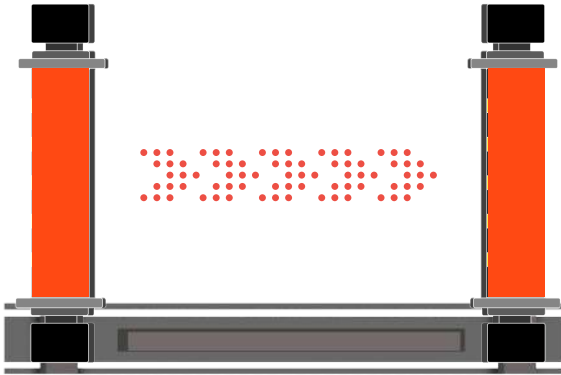


The EI 30 **pedestals can be adjusted** to adapt to a wide variety of shafts.


The **height** of the base **can also be changed** to fit rotors with different diameters.

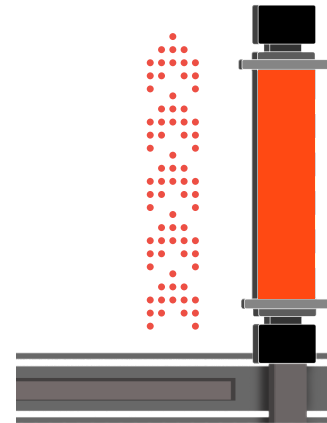

And the **transmission adjuster** will help you achieve the perfect height and tension between the bench and your rotor.

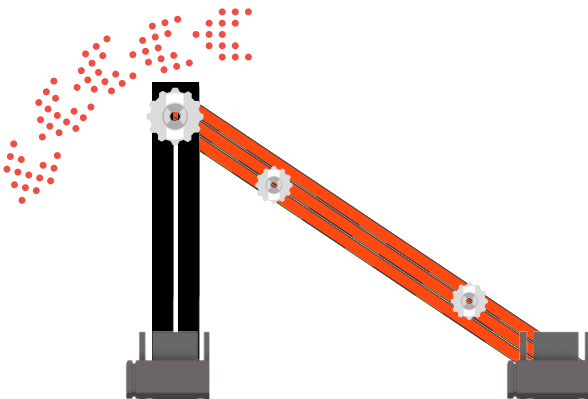

INCLUDED DEVICES



DigivibeMX

Balancing software for 1 and 2 planes
 Calculator with 12 functions
 Balancing Wizard & in situ
 Quality grade
 Polar graphics with vibration phase



GX400

Up to 4 monoaxial accelerometers or 1 triaxial and 1 monoaxial accelerometers
 Cables included
 Compatible with 5V sensors
 Sample rate: 48,000 Hz
 Frequency range: 0.5 - 20,000 Hz
 Use it for dynamic balancing and vibration analysis



Accelerometers AC500 (2)

Sensitivity: 100mV/G
 Frequency response: 0.32-10 KHz
 Magnetic base included
 Made of stainless steel
 Standard 3 pin MIL connector



Laser optical sensor

Analogic output
 Range 1-5,000 Hz
 Operation distance: 20 cm to 15 cm
 Nylamid body
 Magnetic base and cables included

The **EI-30** also includes one of the most powerful **motors** in the market and a high quality **speed driver**.

ADDITIONAL ACCESORIES

Negative load support



Accessory required to secure rotors with high vibration levels like crankshafts. Ensures your balancing is more **secure** and **precise**.

Tablet Windows Surface

One of the most powerful Windows tablets.

The perfect device for dynamic balancing using **DigivibeMX**.



ERBESSD INSTRUMENTS®

WORLDWIDE toll-free:

+1-877-223-4606

ENGLISH:

Sales, Service & Support Engineer

+1-518-874-2700

info@erbessdreliability.com

SPANISH & FRENCH:

Sales, Service & Support Engineer

+52 (55) 6280-7654

info@erbessd-instruments.com

BUY ONLINE

www.erbessd-instruments.com

ALL THE IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY. THE FINAL PRODUCT MAY VARY DEPENDING ON THE VERSION AND/OR THE CHANGES OR UPGRADES MADE TO THE PARTS AND COMPONENTS OF THE DEVICES

© 2018 ERBESSD INSTRUMENTS

EI30-DS2021.0724.12