



# EI SERIES

---

Balancing Machines






## EI-10T

The ideal balancing machine for all types of rotating parts up to 10,000kg including rollers, motor rotors, cranks-hafts, mills, and many others.

### Dimensions of the Balancing Machine

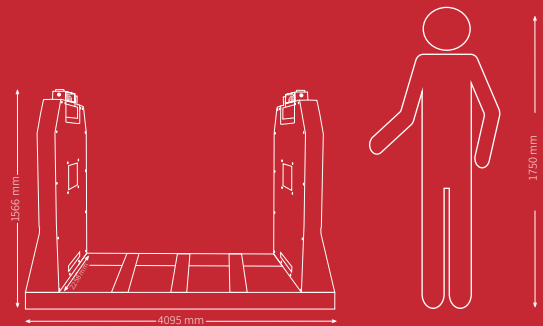

The soft bearing suspension of the EI-10T are manufactured **tough and light** to reduce mechanical inertia.

# TECHNICAL SPECIFICATIONS



**Dimensions:**

4095 x 1566 x  
2258mm



**Sequential  
unbalance  
reduction:** 95%



**Weight:**  
1811 kg (3992 lb)



**Max rotor  
diameter:**  
-1750 mm (68 in)



**Max weight per  
base:**  
5000 kg (11023 lb)



**Power  
transmission:**  
Flat Belt



**Max journal  
diameter:**  
520 mm (20 in)



**Max SBS  
displacement:**  
140 mm (5.5 in)



**Lubrication:**  
Manual



**symmetric load:**  
Min:500 kg (1102.3 lb)  
Max:5000 kg (11023 lb)



**Precision:**  
±0.01 mm/s



**Accelerometer  
Sensitivity:**  
100 mV/g



**distance between  
supports:**  
Min:700 mm (27.5 in)\*




**Residual unbalance:**  
0.02 gr-mm/kg



**Motor features:**  
11kW(15 hp)  
220/440 V, 3 phases,  
4 poles





**Speed driver  
(VFD):**  
Included

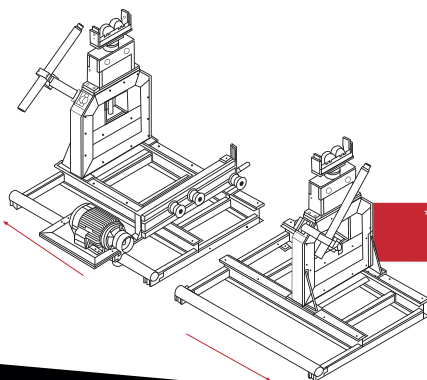

\*The maximum distance of the benches is defined by the user

Every balancing machine in the **EI Series** has a **Soft Bearing Suspension (SBS)** built in.




The **SBS** base has the capability to rotate itself within it's axis and has an **horizontal 45° tilt**. These features protect the poles and provide maximum **durability**.



**Device Model Yaskawa:** GA500  
**Rated Voltage:** 200 to 240 V  
**Capacity Range:** 240V  
**Singlephase:** 1/6 to 5HP (0.1 to 3.7 kW)  
**Input Frequency:** 50/60 Hz  
**Output Frequency:** 0 to 590 Hz

**Mobile App DriveWizard**

## Device diagram

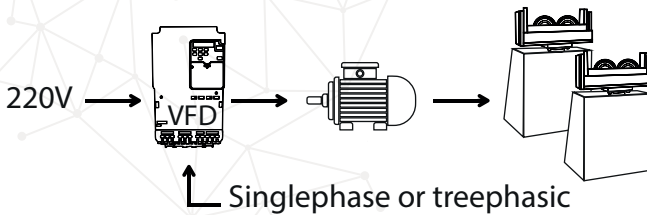

Download the DriveWizard App here





Google play



Apple Store

# ADAPTABILITY LIKE NO OTHER

The EI 10T **pedestals can be adjusted** to adapt to a wide variety of shafts.




The **height of the base can also be changed** to fit rotors with different diameters.

And the **transmission adjuster** will help you achieve the perfect height and tension between the bench and your rotor.



## Configuration of the belt

The configuration of the pulleys depends by the diameter of the rotors on which the belt acts, it is important that the belt be the most vertical possible in the fall (yellow zone)

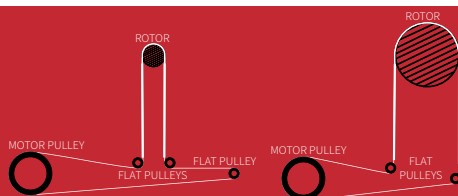

# INCLUDED DEVICES



## DigivibeMX

Balancing software for 1 and 2 planes  
 Calculator with 12 functions  
 Balancing Wizard for balancing In-situ  
 or using Soft Bearing Suspensions  
 personalice quality grade  
 Polar graphics with vibration phase



## Accelerometers AC500 (2)

**Sensitivity:** 100mV/G

**Frequency response:** 0.32-10 KHz

Magnetic base included

Made of stainless steel

Standard 3 pin MIL connector



## Laser optical sensor

Analogic output

**Range:** 1-5,000 Hz

**Operation distance:** 20 cm to 15 cm

Nylamid body

Magnetic base and cables included



## GX400

Up to 4 monoaxial accelerometers or 1 triaxial and 1 monoaxial accelerometers

Cables included

Compatible with 5V sensors

**Frequency range:**

0.5 - 20,000 Hz

Use it for dynamic  
 balancing and vibration analysis

**Sample rate:** 48,000 Hz

The **EI-10T** also includes one of the most powerful **motors** in the market and a high quality **speed driver**.

# ADDITIONAL ACCESORIES



## Negative load support

Accessory required to secure rotors with high vibration levels like crankshafts. Ensures your balancing to be more **secure** and **precise**.



## Tablet Windows Surface

One of the most powerful Windows tablets. The perfect device for dynamic balancing using **DigivibeMX**.



## EI Control Module Optional

Ideal accessory for storage and organization of balancing devices such as computer, interface and tools. Keep your equipment in order with this control panel.

# **ERBESSD INSTRUMENTS®**

**WORLDWIDE toll-free:**

**+1-877-223-4606**

**ENGLISH:**

**Sales, Service & Tech Support**

**+1-518-874-2700**

**info@erbessdreliability.com**

**SPANISH & FRENCH:**

**Sales, Service & Tech Support**

**+52 (55) 6280-7654**

**info@erbessd-instruments.com**

**WEB SITE**

**www.erbessd-instruments.com**

ALL THE IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY. THE FINAL  
PRODUCT MAY VARY DEPENDING ON THE VERSION AND/OR THE CHANGES  
OR UPGRADES MADE TO THE PARTS AND COMPONENTS OF THE DEVICES

© 2018 ERBESSD INSTRUMENTS

EI10T-DS2021.1002.15